

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/012592 A1

- (51) International Patent Classification⁷: **A61B 5/00**, 5/0205
- (21) International Application Number: PCT/CA2003/001171
- (22) International Filing Date: 5 August 2003 (05.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2,397,185 5 August 2002 (05.08.2002) CA
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and
(72) Inventor: **CLOUTIER, Christian** [CA/CA]; 660, des Erables, St-Elzear-de-Beauce, Quebec, G0S 2J0 (CA).
- (74) Agents: **DUBUC, J. et al.**; Goudreau Gage Dubuc, Stock Exchange Tower, Suite 3400, 800 Place Victoria, P.O. Box 242, Montreal, Quebec H4Z 1E9 (CA).
- Published:**
— with international search report
— with amended claims
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: INTELLIGENT SYSTEM AND METHOD FOR MONITORING ACTIVITY AND COMFORT



(57) Abstract: The system and the method of the present invention allows a person in charge (P) to monitor, and to act on, the activity level, physical or cerebral, and the comfort level of one or more subject (S) simultaneously, from a distance, by the provision of a combination of sensors, at least one processing unit, a communication unit vice and at least one control unit, whereby depending on a specific needs of the subject, complementary sensors are selected to measure complementary parameters of the subject (S) and/or of the subject's environment (E) and to process and interpret these measured parameters so as to assess a level of global or localized comfort, in such a way that these parameters are available to the person in charge (P).

TITLE OF THE INVENTION

Intelligent system and method for monitoring activity and comfort.

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to activity and comfort monitoring. More specifically, the present invention is concerned with an intelligent system and a method for monitoring activity and comfort of a subject.

BACKGROUND OF THE INVENTION

10 **[0002]** Efforts have been made previously to create fabrics and garments that which includes an integrated infrastructure for monitoring vital signs of infants, adults or athletes for example.

15 **[0003]** For example, the published international PCT application no. WO0101855 discloses a fabric having an integrated information infrastructure, which can be incorporated or fashioned into a wearable garment and which includes a flexible infrastructure for collecting, processing, transmitting and receiving information concerning a wearer of the garment. The garment comprises a comfort component serving as a base, a plurality of signal transmission paths integrated within the comfort component, and at least one interface that provides a transmission path between the information infrastructure component that is part of the garment and the external device.

20 **[0004]** In the United States published patent application no. US 2002/0013538A1, a method for health signs monitoring are described, including the acts of detecting at least one health sign characteristic of a person with a sensor unit that is located proximate to the individual; producing a health signal from the sensor unit that indicates at least one health sign of the individual;
25 communicating the health signal from the individual to a receiving unit over a

wireless connection; processing the health signal to determine if an emergency condition exists; and providing an indication of emergency conditions to a destination node of a network, wherein operating electrical power is applied to the receiving unit in an initialization mode, the receiving unit determining if the
5 receiving unit has received an identification signal from the sensor unit, and receiving a health signal only from a sensor unit having the received identification signal.

[0005] However, there is still a need in the art for an intelligent system and a method for monitoring activity and comfort in a way that allows
10 adjustment to characteristic of a subject under monitoring, and which allows an action in response to data collection and interpretation.

OBJECTS OF THE INVENTION

[0006] An object of the present invention is therefore to provide an improved intelligent system and method for monitoring activity and comfort.

SUMMARY OF THE INVENTION

[0007] More specifically, in accordance with the present invention, there is provided a system for monitoring activity and comfort of at least one subject, comprising at least one data acquisition unit; and at least one control unit connected to the at least one data acquisition unit, wherein the at least one
20 data acquisition unit comprises a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under monitoring.

[0008] Furthermore, the present invention provides a method for monitoring activity and comfort of at least one subject comprising the acts of
25 collecting data, processing the collected data and transmitting the processed data to a person in charge of the at least one subject, whereby the act of

collecting data uses a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under monitoring, providing a continued updating and adjustment, in an intelligent way, to the at least one subject in
5 relation to an environment thereof.

[0009] Other objects, advantages and features of the present invention will become more apparent upon reading of the following non-restrictive description of embodiments thereof, given by way of example only with reference to the accompanying drawings.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] In the appended drawings:

[0011] Figure 1 is a simplified diagram of a system according to an embodiment of a first aspect of the present invention;

15 [0012] Figure 2 is a flowchart of a transmission power control between the control unit and a data collecting unit of the system of Figure 1;

[0013] Figure 3 is a flowchart of a method according to an embodiment of a second aspect of the present invention;

[0014] Figure 4 is a flowchart of the data collecting act of the method of Figure 3;

20 [0015] Figure 5 is a flowchart of the data processing act of the method of Figure 3;

[0016] Figure 6 is a flowchart of the data transmission act of the method of Figure 3;

[0017] Figure 7 is an isomeric simplified view of a system according to an embodiment of the present invention;

[0018] Figure 8 is a schematic diagram of the sensing unit of the system of Figure 7, when worn by a baby under monitoring;

5 **[0019]** Figure 9 is an exploded view of the movement sensing unit of the system of Figure 7; and

[0020] Figure 10 is a schematic view of optional devices that may be added to the system of Figure 7.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

10 **[0021]** Generally stated, the present invention provides an intelligent system and a method allowing detection, interpretation and monitoring of levels of activity and/or comfort, of a subject, such as a person or an animal, from a distance.

15 **[0022]** Activity encompasses herein physical activity including an absence of a movement, an absence of respiration, a sleeping state, an awoken state, an active state, an intense active state or any other intermediate state, as well as a cerebral activity corresponding to each one of these states for example.

20 **[0023]** A system according to an embodiment of a first aspect of the present invention will now be described in relation to Figures 1-2 of the appended drawings.

[0024] As illustrated in Figure 1, the system 10 generally comprises a data acquisition unit 12 and a control unit 14 connected by a communication unit 13.

[0025] The system 10 further comprises a transport unit 15, which allows the data acquisition unit 12 to keep track of the activity of the subject (S) under monitoring, as well as an environment unit 17, which allows keeping track of parameters of the environment (E), as will be further described hereinbelow, and a environment control unit 19, connected to the control unit 14 via a transreceiver 11 to modify measured environment parameters.

[0026] It is to be noted that the system 10 may comprise several data acquisition units 12 and several control units 14, thereby allowing, for example, a thorough context evaluation.

10 **[0027]** The data acquisition unit 12 comprises a set of sensors 16; a signal-processor 18, a transreceiver 20; and an activity modulator 22.

[0028] The set of sensors 16 is basically a modular and variable set comprising a number of sensors, wherein the nature and connection of the sensors may be varied according to a specific application, as will be exemplified further hereinbelow.

[0029] The set of sensors 16 comprises a motion sensing device, such as piezoelectric film, and /or a cerebral activity sensor.

20 **[0030]** The set of sensors 16 may further comprise a G sensor, GPS, tilt sensor, Infrared sensor, echo sensors, magnetic sensoelectrodes for example, temperature probe, moisture meter, including a sound environment or a body imaging device.

25 **[0031]** The set of sensors 16 collects parameters and sends them to the signal-processor 18, where they are interpreted to be available for display to the person in charge (P), for generating an alarm, or for activating the activity modulator 22. The transreceiver 20 allows exchange of with remote units, via the transreceiver 11 for example. The data acquisition unit 12 thus allows in

time detection of characteristics of the subject (S), while the Environment sensor unit 17 collects parameters of the environment (E).

[0032] The control unit 14 comprises a communication device 24 and a user interface 26. The communication device 24 may be connected to the transceiver 20 of the data acquisition unit 12 through a transceiver 28. It may receive parameters of the environment (E) through a transceiver 11 connected to the environment sensor unit 17. The communication device 24 may be an electronic circuit, connected to the user interface 26 or a wireless (RF) communication device for example. It allows a visual, sound, or tactile online consultation by the person in charge (P) or to transfer the data to a communication network (see Figure 1). The control unit 14 may be a remote control unit.

[0033] The control unit 14 further comprises a signal processor including a memory and processing means, to store and process data received from the acquisition unit 12. As already mentioned hereinabove, it may be connected via a port 29 to the network (N) (see Figure 1). The communication device 24 allows a person in charge (P) of the subject (S) to be informed of a status thereof, in terms of levels of activity, comfort, and of complementary parameters. The person in charge (P), in turn, may order from a distance a variation of the levels of activity or comfort, or a request for complementary data including a sound level of the environment (E), video images of the subject for instance, via the interface 26.

[0034] From the foregoing, it should now be apparent that the control unit 14 may be used by the person in charge (P) to follow in real time activity of the subject (S), to order a transmission of data and /or an activation of sensors or a retroaction.

[0035] Interestingly, the data acquisition unit 12 manages a communication setting in relation to data acquisition, while the control unit 14 is in charge of the management of the integrity and security of the system in relation to external interference for example, as well as of energy savings and lowering electromagnetic radiation by an adjustment of a power level of transmission, as will now be described.

[0036] Figure 2 illustrates how a transmission power between the acquisition unit 12 and control unit 14 is monitored. After a step of identity validation, synchronization and communication protocol recognition (316), the control unit emits a periodic signal (act 318), so that the acquisition unit may adjust its emissive power accordingly (act 320). The control unit then confirms that the adjusted emitting power of the acquisition unit is adequate (act 322), so that transmission from the acquisition unit and the control unit may adjust to a distance and to a desired quality of transmission (act 324).

[0037] Therefore, the system of the present invention the person in charge (P) to monitor, and to act on, the activity level, physical or cerebral, and the comfort level of one ore more subject (S) simultaneously, from a distance, by the provision of a combination of sensors, at least one processing unit, a communication unit vice and at least one control unit.

[0038] The combination of sensors comprises movement sensors such as multi-wing piezofilm for example (described hereinbelow) and /or electrodes sensitive to cerebral waves, with a number of complementary sensors if required, such as a temperature sensing unit to assess the level of comfort, thereby allowing a contextual assessment of the activity and comfort.

[0039] Depending on a specific application, the complementary sensors are selected to measure complementary parameters of the subject (S) and/or of the subject's environment (E) and to process and interpret these

measured parameters so as to assess a level of global or localized comfort and to be available to the remote person in charge (P).

[0040] It may be further contemplated to provide a main data acquisition unit comprising movement sensors such as a wing-shaped piezofilm and/or electrodes sensitive to cerebral waves, and a complementary data acquisition unit to collect additional complementary data.

[0041] Such a system may find application in a number of fields, such as children care, senior citizens care, either at home or in a health institution for example, security of workers etc.

[0042] In a second aspect of the present invention, a method for monitoring activity and comfort levels is provided, as illustrated in Figures 3-6.

[0043] The method 90 (see Figure 3) generally comprises collecting data (act 100, see Figure 4), processing the data collected (act 200, see Figure 5) and transmitting the processed data (act 300, see Figure 6).

[0044] The collecting data step 100 is illustrated in Figure 4. A number of data are collected by an acquisition unit, described hereinabove in relation to the first aspect of the present invention described hereinabove. Main data may be collected by a main data acquisition unit (act 110) and complementary data may be collected by a complementary data acquisition unit (act 120). The collected data are conditioned (act 130) and formatted (act 140) according to a sensibility and performance of sensors used in the collecting data steps 110, 120. The data are then stored (act 150), or directed to the processing step (act 200) or the transmitting step (act 300). As described hereinabove in relation to the first aspect of the present invention, the main data acquisition unit comprises a movement sensor and / or a cerebral activity

sensor, and the complementary data acquisition unit comprises complementary sensors, which may be selected according to specific needs.

5 **[0045]** The processing step (act 200) illustrated in Figure 5, comprises processing the main data (202), and processing the complementary data (204), in the example given hereinabove.

[0046] The conditioned and formatted main data are evaluated in relation to preset threshold values (act 220) and to criteria for threshold variation (act 230), to yield a processing threshold value and intervals corresponding to levels of activity and comfort (act 240).

10 **[0047]** The conditioned and formatted complementary data may be integrated in the evaluation, provided with a weight depending on the specific application (act 250). A resulting observed level is then obtained (act 260), which is compared with stored levels or activity patterns previously obtained (270), in order to adjust scaling of activity levels and alarm levels (act 280) and
15 to yield processed data (act 290).

[0048] Thus, the processing step (act 200) involves an analysis of the data collected in act 100 in such a way as to allow a on-going adjustment to the activity characteristics and history of the subject (S), for example in the case of a baby, to adjust to the baby's growth and a corresponding increase in
20 movements intensity and frequency. Therefore, the method of the present invention allows a continued up dating and adjustment, in an intelligent way, to the subject (S) and the environment (E) under monitoring.

[0049] As illustrated in Figure 6, in the case when the data processing act 200 indicates that a threshold is reached, a transmission to the
25 control unit (act 310) is immediately initiated), and a retroaction unit 312 such as a physical activity stimulator, connected to the processing unit, may be

immediately activated (act 320). The data processing step therefore allows an adjustment in real time to specific characteristics of activity and comfort of a given subject.

[0050] When the analysis of the data (act 200) indicates that the parameters monitored are in an acceptable range, in relation to threshold values for example, a basic transmission of the data to the control unit is performed (act 314).

[0051] As a way of example, a specific application of the present invention will now be described, in relation to Figures 7-10 of the appended drawings. This example relates to an activity/comfort intelligent monitoring system and method for a baby.

[0052] The system 30 comprises a sensing unit 32 provided with a base 34, and a control unit 36.

[0053] The sensing unit 32 is typically of a very small size, and portable, and includes a number of sensors and a transmitter means; it is designed to be worn by the baby under monitoring. The base 34 is used for transportation of the sensing unit 32, and may also provide for a recharge thereof.

[0054] The control unit 36 may be of a pager type and is typically provided with a screen. It is designed to be held by a person in charge of the baby.

[0055] As illustrated in Figure 8, the sensing unit 32 may be maintained in a close relationship with the body of the baby 36 under monitoring, for example by means of a tight piece of clothing 38, which may be provided with a pocket 40 to receive the sensing unit 32. Alternatively, a strip of cloth or strap may be used instead of the piece of clothing 38 to maintain the

sensing unit 32 is a closed relationship with the body of the baby 36 under monitoring.

[0056] The sensing unit 32 may comprise a wing-shaped piezoelectric device 42, best seen in Figure 9, allowing sensing movements of the body of the baby 38 by a bending and distortion of wings 43 that generate an electrical current. The resulting electrical current is amplified and transmitted to a micro controller for analysis and comparison with activity thresholds corresponding to a sleeping state of the baby for instance. Thus, the level of movements of the baby 38 is interpreted and transmitted, or first transmitted and then interpreted, to the control unit 36, for example by microwave transmission. It is to be noted that activity thresholds are updated to take into account changes in the baby's condition, such as its age and size for example.

[0057] More precisely, the wing-shaped piezoelectric device 42 illustrated in Figure 9 comprises at least one piezo film coated with a flexible, non-allergenic and isolating material, and is provided for example with two wings 43. The wings 43 are provided with perforations 45 allowing calibrated position thereof. The flexible, non-allergenic and isolating material is molded so as to embed the piezo films with a wing shape, thereby protecting the piezo films and providing a seal ring between sides of the base 34 (see Figure 7).

[0058] When located close to the sternum of the baby, such a device 42 allows detecting movements of its rib cage and of diaphragm, and determining its respiratory movements. By processing differential signals from the two wings 43 and analysis of the frequency and intensity of these electrical signals, its heartbeat may be obtained. Therefore, the device 42 allows assessing an activity level of the baby.

[0059] Interestingly, such a device 42 may be integrated in a portable assembly 47 and does not require any fixation means, since it may be

secured into place in a pocket of a cloth worn by the subject or held by a strap around its body. Its allows detecting movements on a surface it is in contact with in a plurality of sites.

[0060] The control unit 36 receives a signal of the state of the baby at intervals, so that the person (P) in charge of the baby 38 may be alerted by a sound alarm or a visual alarm appearing on the screen of the control unit 36.

[0061] A number of alarms may be determined, including for example an alarm corresponding to awaking of the baby, an alarm corresponding to an absence of movement after a predetermined delay, etc.

[0062] The control unit 36 may be programmed to allow the person in charge of the baby 38 to check the baby's state at any time, and therefore to take adequate actions using an activity modulator as described hereinabove.

[0063] Adequate actions may comprise for example an action performed by the person in charge (P) or programmed by the person in charge (P) following the reception of the interpreted data. They may include activating a transmission, activating one of the sensors of the set of sensors of the data acquisition unit, a request for a audio or a video signal in the environment or towards remote receivers, modifications of the activity and/or comfort parameters detected or request for modifications thereof sent to separate systems via a user interface (including stimulation, nature modification and decrease of an activity parameter for example, and heating, ventilating, light modification, positioning modifications in the comfort parameters for example, etc.).

[0064] Indeed, the control unit 36 may be provided with a screen for display of icons giving information related to the activity of the baby, such as its resting state, its awaken state, its active awaken state and an absence of

movement thereof, including an absence of respiration thereof, or its being in a prone position for example.

[0065] In order to detect that the baby's movements have resulted in a prone position, the sensing unit 32 may be provided with a tilt sensor, in such
5 the prone position is detected by a microcontroller and triggers the sending of a corresponding signal to the control unit 36. An associated alarm signal, either sound or visual, may also be triggered.

[0066] A possible functionality of the system 30 is to monitor the temperature of the baby 38. Therefore, the sensing unit 32 allows measuring a
10 cutaneous temperature of the baby 38 and comparing it to a reference temperature set as a comfort temperature zone so as to determine whether the baby 38 is comfortable. The comfort temperature zone is predetermined according to the baby's specific characteristics, including for example its age, its size, and a proper sensitivity thereof, its state of health etc., and may be
15 updated accordingly when required.

[0067] The control unit 36 allows the person in charge of the baby 38 to check icons related to the baby's temperature.

[0068] Alternatively, a thermistor device may be positioned in the base 34 of the sensing unit 32, to measure the cutaneous temperature via an
20 opening in the pocket 40 illustrated in Figure 8. This temperature is then compared to a predetermined comfort temperature zone, which is stored in a memory of the system. An indicator may indicate whether the measured temperature lies in the predefined comfort zone, allowing the person in charge to take adequate actions.

[0069] Obviously, the reference comfort temperature is a
25 predetermined temperature value that is programmed in the system 20 that

may be updated according to individual variations of the baby 38. A predetermined range considered as a physiologic range may be preset to limit the amount of allowed updating for example.

[0070] In the case when no movement has been detected for a while, for example, 20 seconds or any other predetermined lapse of time, a stimulating device connected to the baby 38, such as a vibrating motorized device that may be directly contacting the baby's body, may be triggered with selectionable level of stimulation by the person in charge through the control unit 36, to cause the baby 38's reaction.

[0071] Interestingly, the use of wing-shaped piezofilm sensors 42 illustrated in Figure 9 also allows monitoring heart beating by a differential sensing of the wings. Depending on a detected frequency, the heart beating may be interpreted as characteristic of a rest state or of an active state and yields a signal delivered to the control unit 36. The control unit 36 may be provided with an indicator lamp for example, which flickering frequency allows visualizing variation of the heart beating detected.

[0072] A failure of the transmission between the sensing unit 32 and the control unit 36 may be immediately reported by the same heart beating indicator lamp or another indicator lamp remaining on and/or a sound alarm, for example. A same mechanism may be used to indicate battery status for example.

[0073] The control unit 36 may further comprise sound module or audio/video module 50 in such a way as to be used as a bi-directional intercommunicating unit or to be able to receive image, of the type "clip on" 52 or "slot" (see Figure 10). Correspondingly, the base 34 is then provided with sound and image devices.

[0074] The base 34 may be provided with a microphone, a loudspeaker 56 (see Figure 7), a radio receiver and a radio transmitter, or with a camera 54 and a video transmitter for example, the control unit 36 being then equipped with complementary devices, such as a sound transmitter to allow the person in charge (P) to speak to the baby 38 via the loudspeaker 56 of the base 34 for example, in an upgradable fashion, as illustrated in Figure 10. Any sound or video signal may then be exchanged between the base 34 and the control unit 36 upon request.

[0075] The system 30 allows an identification link between the sensing unit 32 and the control unit 36, in such a way that the sensing unit 32 is uniquely connected to the control unit 36. The control unit 36 may however be used in connection to a number of different sensing units 32, to allow a same person to supervise a number of babies, for example.

[0076] The base 34 may be used for recharging the sensing unit 32, and also the control unit 36 by allowing a contact to a modular loader and a rechargeable battery provided as an option, wherein the rechargeable battery may be plugged to the electrical network by means of an external current transformer adapted to the network and working at a low voltage. Alternatively, the control unit 36 may be powered by batteries. In any case, warning indicators are provided to notify a user of failing batteries.

[0077] From the foregoing, it should now be apparent that the system and method of the present invention allows for a supervision and modification, even from a distance, of a level of physical and /or cerebral activity and of comfort, by using and combining sensors and communication devices providing a detection, characterization, follow-up and modification of the level of physical activity and of comfort of a living person or of an animal in particular. Physical activities include a state of immobility (i.e. absence of a movement), a sleeping state, a more or less active awoken state, a more or

less intense active state and any variant in between these extremes, as well as a level and nature of a cerebral activity. Comfort is assessed as a subjective perception and/or as a parameterized perception of specific parameters including temperature, humidity, stress points of the body, as well as global
5 comfort direct or indirect measurements including stress indications and brain waves.

[0078] In a contemplated application related to senior citizen, G sensor and tilt sensor may be used to detect a fall of the subject; the system and method of the present invention allow monitoring activity levels before and
10 after a falling event, thereby establishing an historical record of data and allowing a post event analysis of movement, and enable a remote monitoring wherein a non-response situation triggers an alarm.

[0079] Although specific applications of the system and method of the present invention have been presented, people in the art will appreciate
15 that they may find application in a number of fields, including for example monitoring of a level of activity and work intensity of a labor force or of people whose activity places them at risk and requiring a possibility of a remote intervention, such as a firefighter, a security guard, or a mine worker for instance. Moreover, the system and method of the present invention may also
20 be contemplated for supervision of animals, for detection of animal kindling and for animal supervision purposes for example.

[0080] Although the present invention has been described hereinabove by way of embodiments thereof, it can be modified, without departing from the nature and teachings of the subject invention as defined in
25 the appended claims.

WHAT IS CLAIMED IS:

1. A system for monitoring activity and comfort of at least one subject, comprising:

at least one data acquisition unit; and

5 at least one control unit connected to said at least one data acquisition unit;

wherein said at least one data acquisition unit comprises a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under
10 monitoring.

2. The system for monitoring activity and comfort according to claim 1, wherein said set of sensors comprises main sensors selected in the group comprising movement sensors and cerebral activity sensors, and complementary sensors selected in the group comprising G sensor, GPS, tilt
15 sensor, infrared sensor, echo sensors, magnetic sensoelectrodes, temperature probe, moisture meter, sound environment sensor and body imaging device.

3. The system for monitoring activity and comfort according to any one of claims 1 to 2, wherein said at least one data acquisition unit further comprises a signal-processor receiving data from said set of sensors, and an
20 activity modulator connected to said signal-processor.

4. The system for monitoring activity and comfort according to any one of claims 1 to 3, wherein said at least one control unit comprises a communication device and a user interface.

5. The system for monitoring activity and comfort according to
25 claim 4, wherein said communication device further comprises a signal processor including a memory and processing means.

6. The system for monitoring activity and comfort according to any one of claims 4 and 5, wherein said communication device is connected to a network.

5 7. The system for monitoring activity and comfort according to anyone of claims 4 to 6, wherein said communication device allows adjusting a transmission power between said data acquisition unit and said control unit.

10 8. The system for monitoring activity and comfort according to anyone of claims 1 to 7, further comprising a transport unit, which allows said at least one data acquisition unit to keep track of the activity of the at least one subject, and an environment unit which allows keeping track of environmental parameters.

9. The system for monitoring activity and comfort according to any one of claims 2 to 8, wherein said set of sensors comprises a wing-shaped piezoelectric sensor.

15 10. The system for monitoring activity and comfort according to claim 9, wherein said wing-shaped piezoelectric sensor comprises at least one piezo film coated with a flexible, non-allergenic and isolating material.

20 11. The system for monitoring activity and comfort according to any one of claims 9 and 10, wherein said wing-shaped piezoelectric sensor detects movements selected in the group comprising the at least one subject's rib cage movements, the at least one subject's diaphragm movements, the at least one subject's respiratory movements and the at least one subject's heartbeat.

25 12. The system for monitoring activity and comfort according to any one of claims 9 to 11, wherein said wing-shaped piezoelectric sensor comprises wings which position is able to be calibrated.

13. The system for monitoring activity and comfort according to anyone of claims 4 to 14, wherein said interface allows a person in charge of the at least one subject to be informed of a state thereof, to order a retroaction according to this state and to request complementary data selected in the group comprising a sound level, and video images.

14. The system for monitoring activity and comfort according to anyone of claims 2 to 15, wherein said temperature probe allows measuring a cutaneous temperature of the subject and comparing it to a reference temperature set as a comfort temperature zone.

15. The system for monitoring activity and comfort according to claim 14, wherein the comfort temperature zone is updated in relation to characteristics of the at least one subject selected in the group comprising its age, its size, a proper sensitivity thereof, its state of health.

16. The system for monitoring activity and comfort of according to anyone of claims 2 to 15, wherein the set of sensors is maintained in a close relationship with the at least one subject's body.

17. The system for monitoring activity and comfort according to anyone of claims 1 to 16, wherein said at least one control unit receives signals of a state of the at least one subject at intervals and provides alerts.

18. The system for monitoring activity and comfort of according to claim 17, wherein the alarms are triggered by states selected in the group comprising awaking of the at least one subject, absence of movement after a predetermined delay and position variations.

19. The system for monitoring activity and comfort according to anyone of claims 1 to 18, wherein said at least one control unit comprises modules selected in the group comprising sound modules and audio/video

modules and said at least one data acquisition unit is provided with devices selected in the group comprising a microphone, a loudspeaker, a radio receiver, a radio transmitter, a camera and a video transmitter.

20. The system for monitoring activity and comfort according to
5 anyone of claims 1 to 19, wherein activity comprises activities selected in the group comprising rest, physical activity, absence of a movement, absence of respiration, a sleeping state, an awoken state, an active state, an intense active state, an intermediate active state and cerebral activity, and said monitoring comprises an assessment of a intensity and of a nature of said activity from a
10 distance.

21. The system for monitoring activity and comfort according to any one of claims 1 to 10, wherein said data acquisition unit is integrated in a portable assembly.

22. The system for monitoring activity and comfort according to
15 any one of claims 2 to 8, wherein said set of sensors comprises selected in the group comprising a G sensor and a tilt sensor to detect a fall of the subject.

23. The system for monitoring activity and comfort according to claim 22, wherein the system is used to monitoring activity levels before and after a falling event, thereby establishing an historical record of data and
20 allowing a post event analysis of movement, and enable a remote monitoring wherein a non-response situation triggers an alarm.

24. A method for monitoring activity and comfort using the system according to anyone of claims 1 to 23.

25. A method for monitoring activity and comfort of at least one
25 subject comprising the acts of collecting data, processing the collected data and transmitting the processed data to a person in charge of the at least one

subject, whereby said act of collecting data uses a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under monitoring, providing a continued updating and adjustment, in an intelligent way, to the at least one subject in relation to an environment thereof.

26. The method according to claim 25, whereby said act of collecting data comprises collecting main data, and collecting complementary data.

27. The method according to claim 26, whereby collecting main data comprises using sensors selected in the group comprising movement sensors and a cerebral activity sensors, and said collecting complementary data comprises using complementary sensors selected according to specific needs in the group comprising G sensor, GPS, tilt sensor, infrared sensor, echo sensors, magnetic sensoelectrodes, temperature probe, moisture meter, sound environment sensor and body imaging device.

28. The method according to anyone of claims 25 to 27, wherein said act of processing the data comprises evaluating the data in relation to preset threshold values and to criteria for threshold variation, obtaining a processing threshold value and intervals corresponding to levels of activity and comfort, comparing with stored levels or activity ing processed data.

29. The method according to anyone of claims 25 to 28, wherein said act of transmitting the data comprises sending the data to a control unit and displaying the data to a person in charge of the at least one subject.

30. The method according to claim 29, wherein said act of transmitting the data further comprises activating a retroaction unit.

31. The method according to anyone of claims 25 to 30, wherein said act of transmitting the data comprises adjusting a transmission
5 power between a data acquisition unit used in the act of collecting the data and a control unit used in the act of processing the collected data.

32. The method according to claim 31, wherein said adjusting a transmission power between the data acquisition unit and the control unit comprises an act of identity validation, synchronization and communication
10 protocol recognition, an act of emission of a periodic signal by the control unit, and an act of adjustment of an emissive power of the acquisition unit.

AMENDED CLAIMS

[received by the International Bureau on 26 January 2004 (26.01.04);
original claims 1 to 32 replaced by claims 1 to 23 (5 pages)]

1. A system for monitoring activity and comfort of at least one subject, comprising:

at least one data acquisition unit comprising a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under monitoring; and

at least one control unit connected to said at least one data acquisition unit;

wherein said at least one data acquisition unit further comprises devices selected in the group consisting of a microphone, a loudspeaker, a radio receiver, a radio transmitter, a camera and a video transmitter; and

wherein said at least one control unit comprises modules selected in the group consisting of sound modules and audio/video modules.

2. The system according to claim 1, wherein said set of sensors comprises main sensors selected in the group consisting of movement sensors and cerebral activity sensors, and complementary sensors selected in the group consisting of G sensor, GPS, tilt sensor, infrared sensor, echo sensors, magnetic sensoelectrodes, temperature probe, moisture meter, sound environment sensor and body imaging device.

3. The system according to anyone of claims 1 and 2, wherein said at least one data acquisition unit further comprises a signal-processor receiving data from said set of sensors, and an activity modulator connected to said signal-processor.

4. The system according to anyone of claims 1 to 3, wherein said at least one control unit comprises a communication device and a user interface.

5. The system according to claim 4, wherein said communication device comprises a signal processor including a memory and processing means.

6. The system according to any one of claims 4 and 5, wherein said communication device is connected to a network.

7. The system according to anyone of claims 4 to 6, wherein said communication device allows adjusting a transmission power between the data acquisition unit and the control unit.

8. The system according to anyone of claims 1 to 7, further comprising a transport unit, which allows said at least one data acquisition unit to keep track of the activity of the at least one subject, and an environment unit which allows keeping track of environmental parameters.

9. A system for monitoring activity and comfort of at least one subject, comprising:

at least one data acquisition unit comprising a modular and variable set of sensors comprising a number of sensors, which nature and connection are combined according to needs of the at least one subject under monitoring; and at least one control unit connected to said at least one data acquisition unit;

wherein said set of sensors comprises a wing-shaped piezoelectric sensor and sensors selected in the group consisting of G sensor, GPS, tilt sensor, infrared sensor, echo sensors, magnetic sensoelectrodes, temperature probe, moisture meter, sound environment sensor and body imaging device.

10. The system according to claim 9, wherein said wing-shaped piezoelectric sensor comprises at least one piezo film coated with a flexible, non-allergenic and isolating material.

11. The system according to any one of claims 9 and 10, wherein said wing-shaped piezoelectric sensor detects movements selected in the group consisting of the at least one subject's rib cage movements, the at least one subject's diaphragm movements, the at least one subject's respiratory movements and the at least one subject's heartbeat.

12. The system according to any one of claims 9 to 11, wherein said wing-shaped piezoelectric sensor comprises wings which position is able to be calibrated.

13. The system according to anyone of claims 4 to 12, wherein said user interface allows a person in charge of the at least one subject to be informed of a state thereof, to order a retroaction according to the state of the at least one subject and to request complementary data selected in the group consisting of sound levels and video images.

14. The system according to anyone of claims 2 to 13, wherein the temperature probe allows measuring a cutaneous temperature of the subject and comparing it to a reference temperature set as a comfort temperature zone.

15. The system according to claim 14, wherein the comfort temperature zone is updated in relation to characteristics of the at least one subject selected in the group consisting of its age, its size, a proper sensitivity thereof, its state of health.

16. The system according to anyone of claims 2 to 15, wherein the set of sensors is maintained in a close relationship with the at least one subject's body.

17. The system according to anyone of claims 1 to 16, wherein said at least one control unit receives signals of a state of the at least one subject at intervals and provides alerts.

18. The system according to claim 17, wherein the alarms are triggered by states selected in the group consisting of awaking of the at least one subject, absence of movement after a predetermined delay and position variations.

19. The system according to anyone of claims 1 to 18, wherein activity comprises activities selected in the group consisting of rest, physical activity, absence of a movement, absence of respiration, a sleeping state, an awoken state, an active state, an intense active state, an intermediate active state and cerebral activity, and monitoring

comprises an assessment of an intensity and of a nature of the activity from a distance.


20. The system according to any one of claims 1 to 19, wherein said data acquisition unit is integrated in a portable assembly.


21. A system for monitoring activity and comfort, comprising :
at least one data acquisition unit comprising a modular and variable set of sensors; and
at least one control unit connected to said at least one data acquisition unit;
wherein said set of sensors comprises at least one sensor selected in the group consisting of a G sensor and a tilt sensor to detect a fall of the subject.

22. The system according to claim 21, said system being used for monitoring activity levels before and after a falling event, thereby establishing an historical record of data and allowing a post event analysis of movement, said system allowing a remote monitoring wherein a non-response situation triggers an alarm.



23. A method for monitoring activity and comfort using the system according to anyone of claims 1 to 22.

1/8

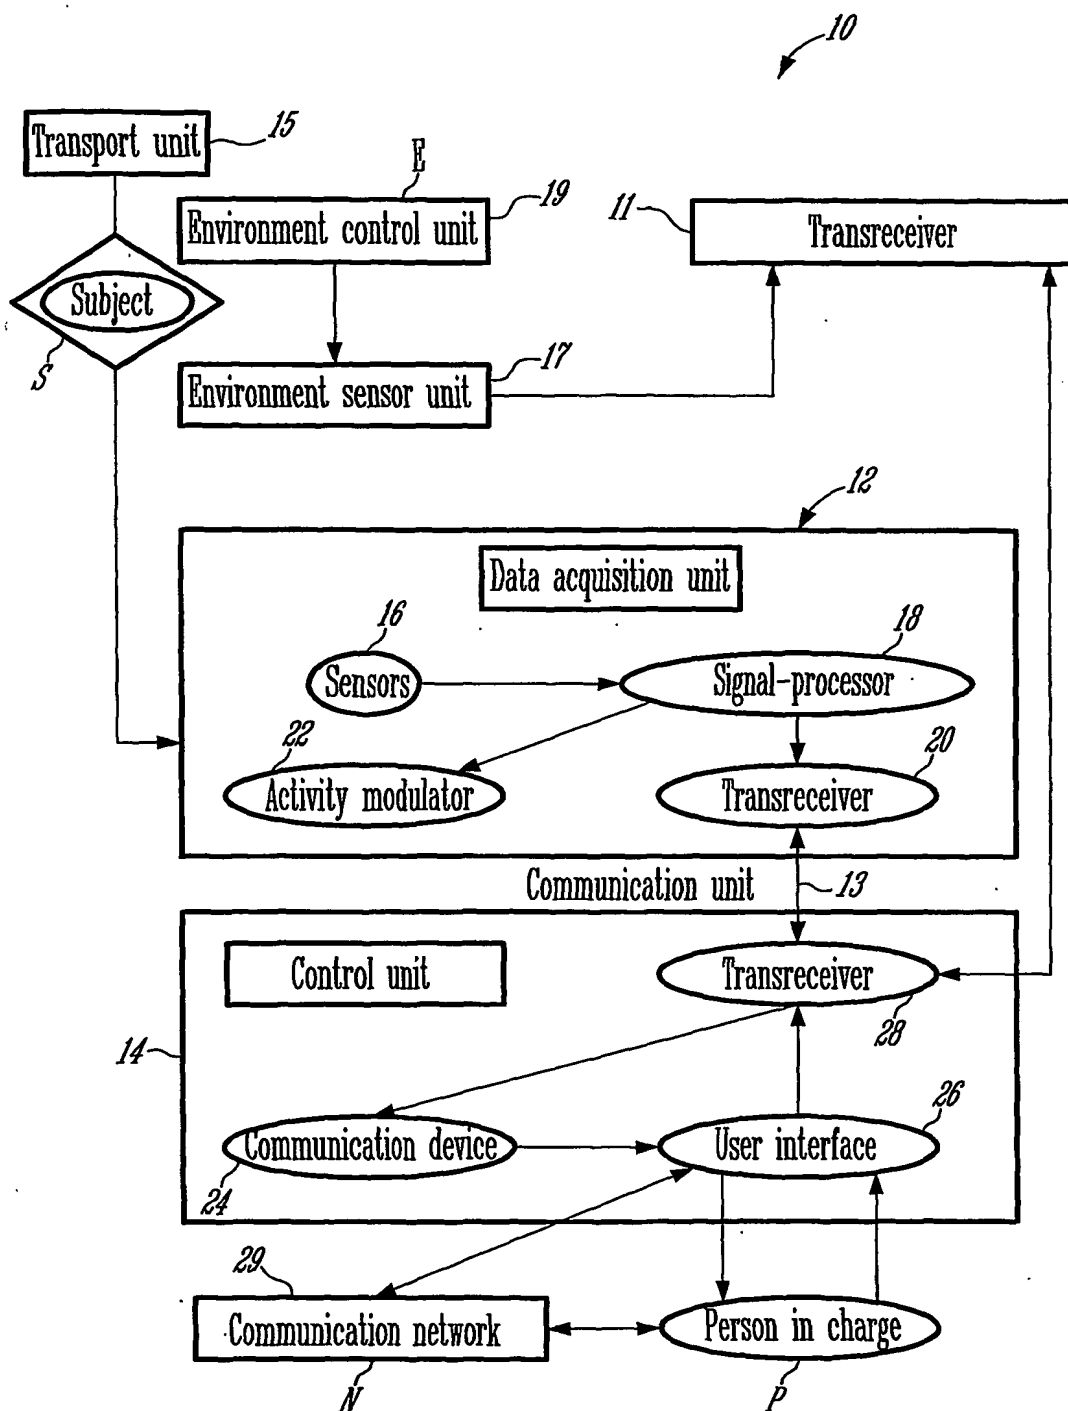
FIG. 1

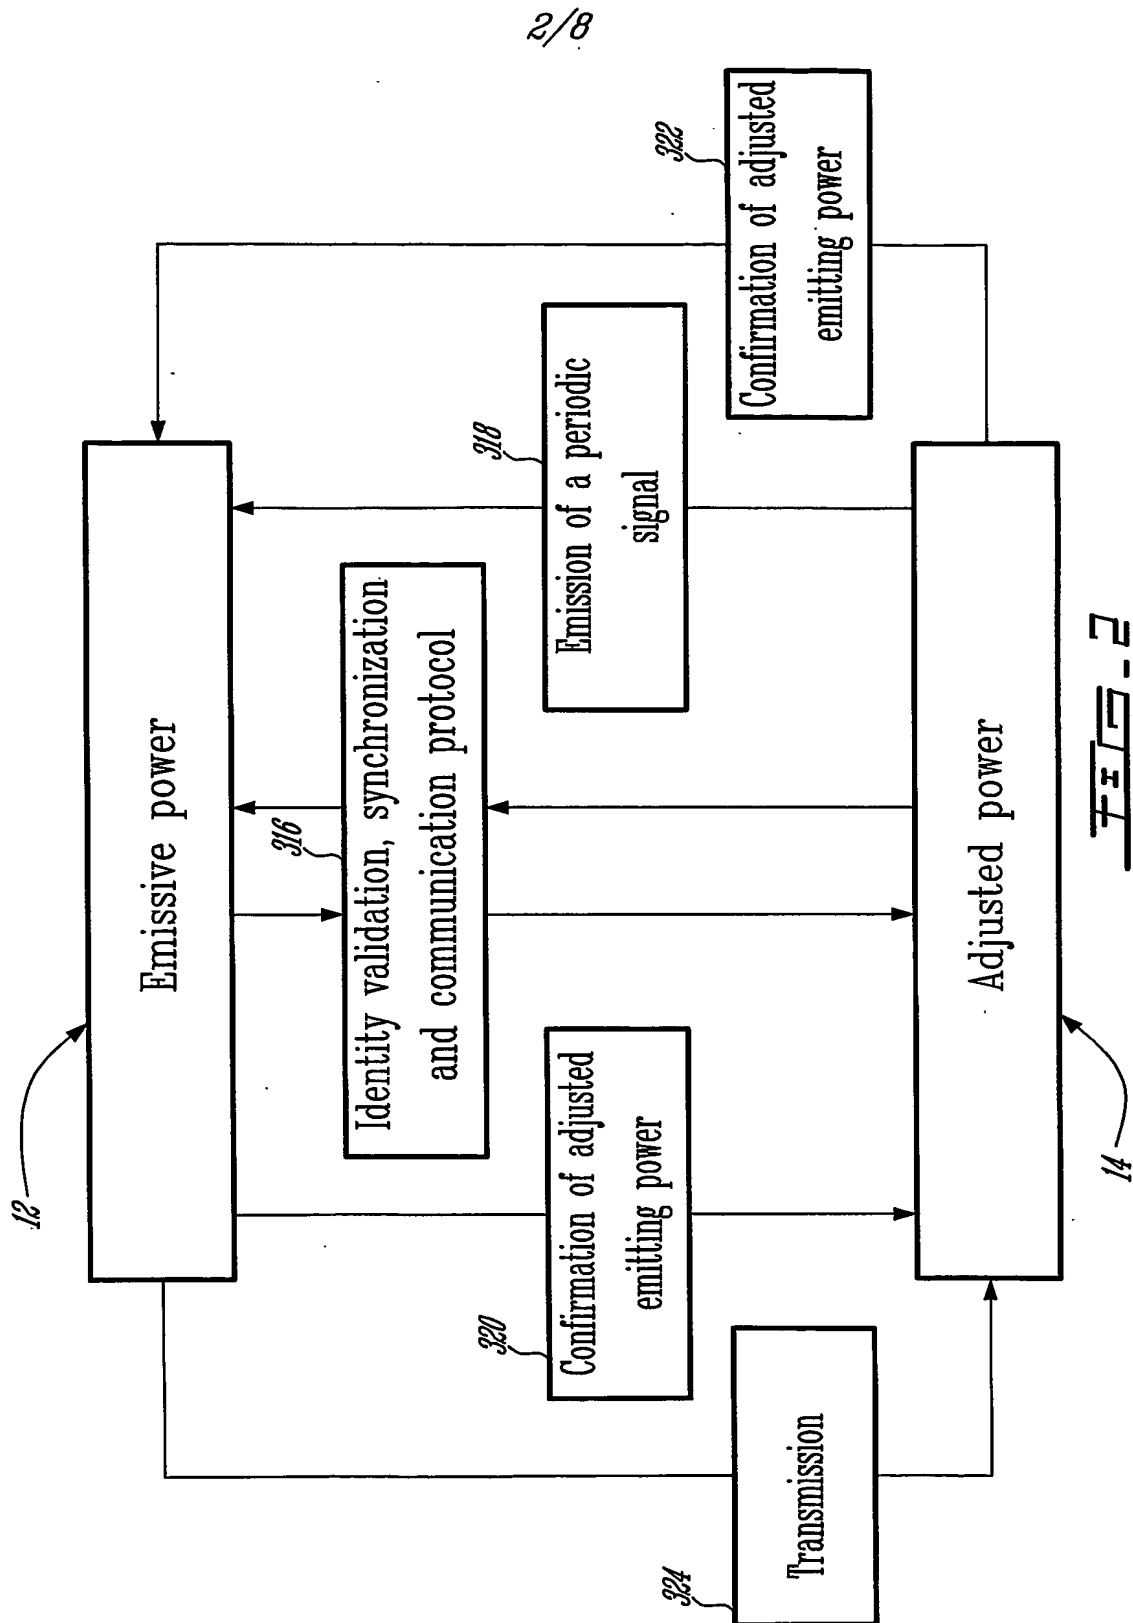


3/8

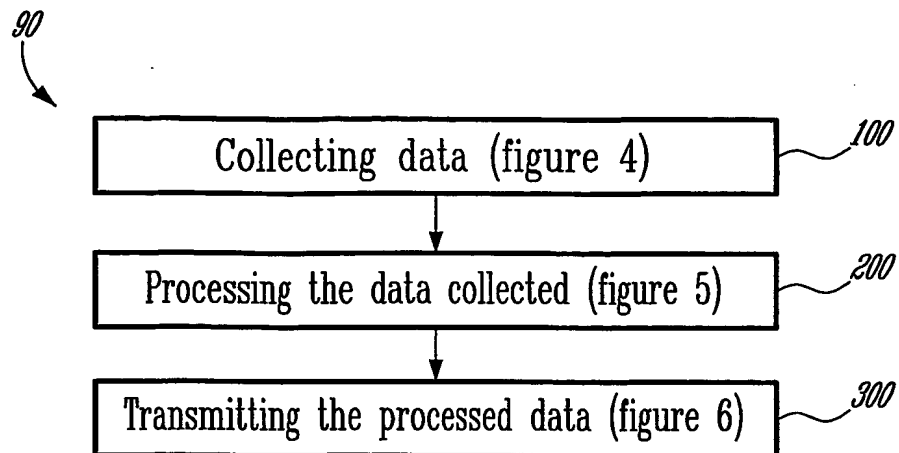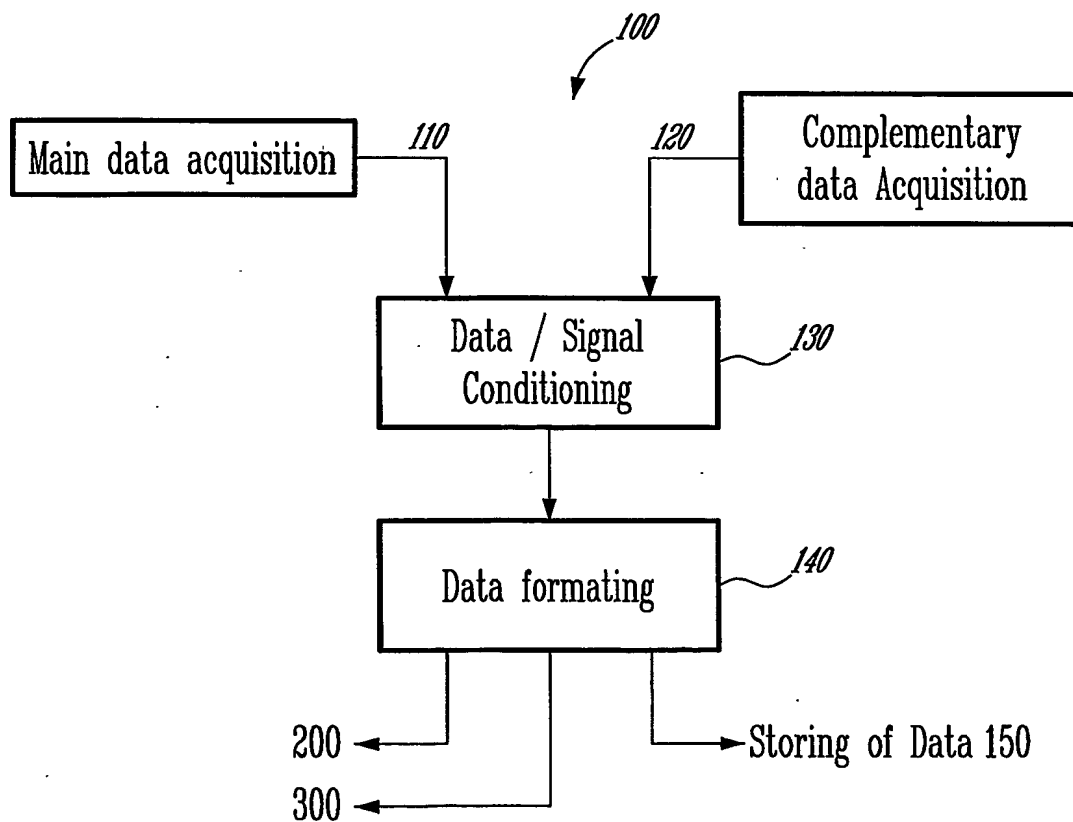FIG. 3FIG. 4

4/8

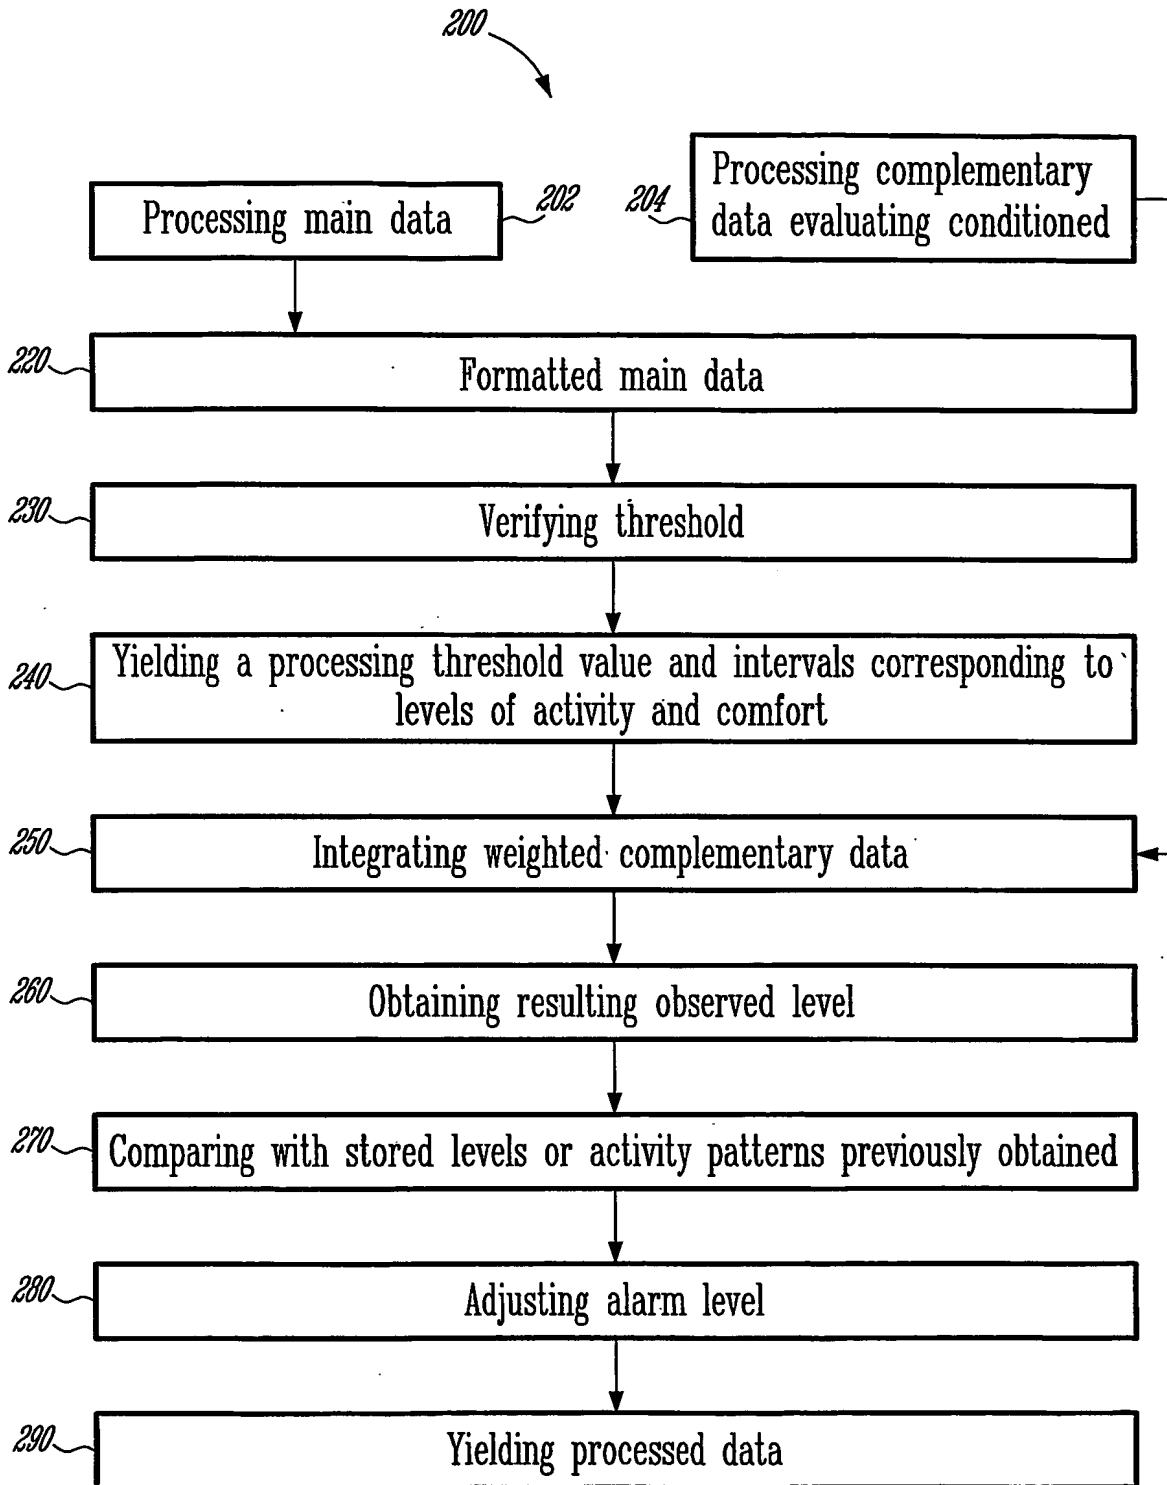FIG. 5

5/8

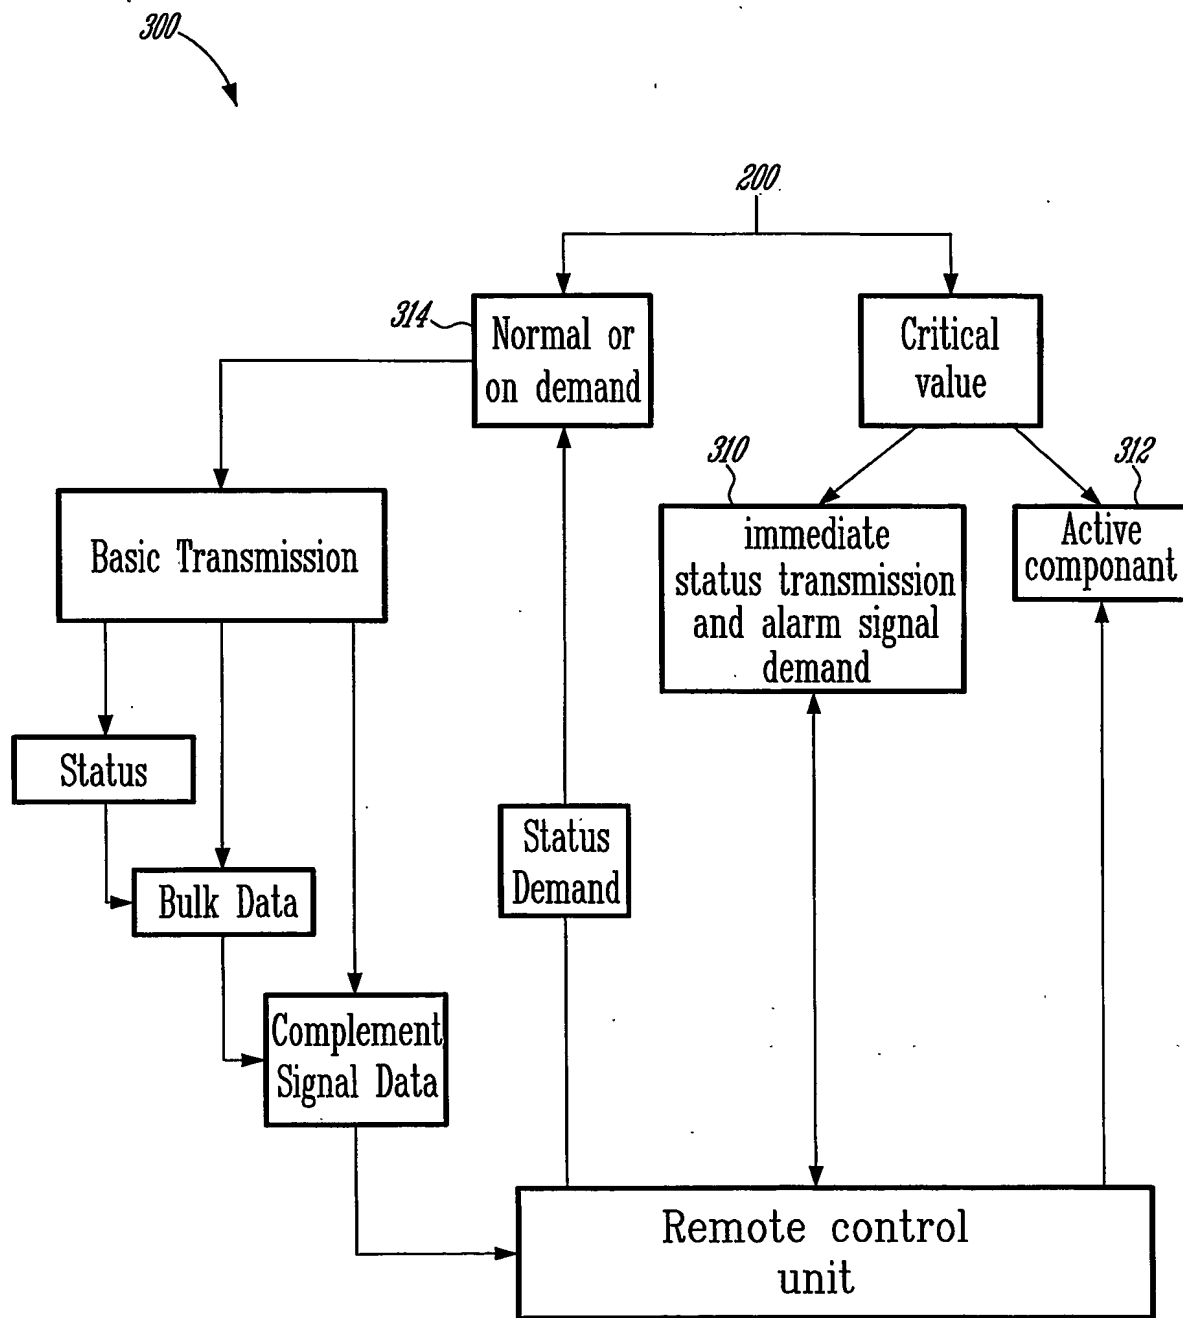FIG. 6

6/8

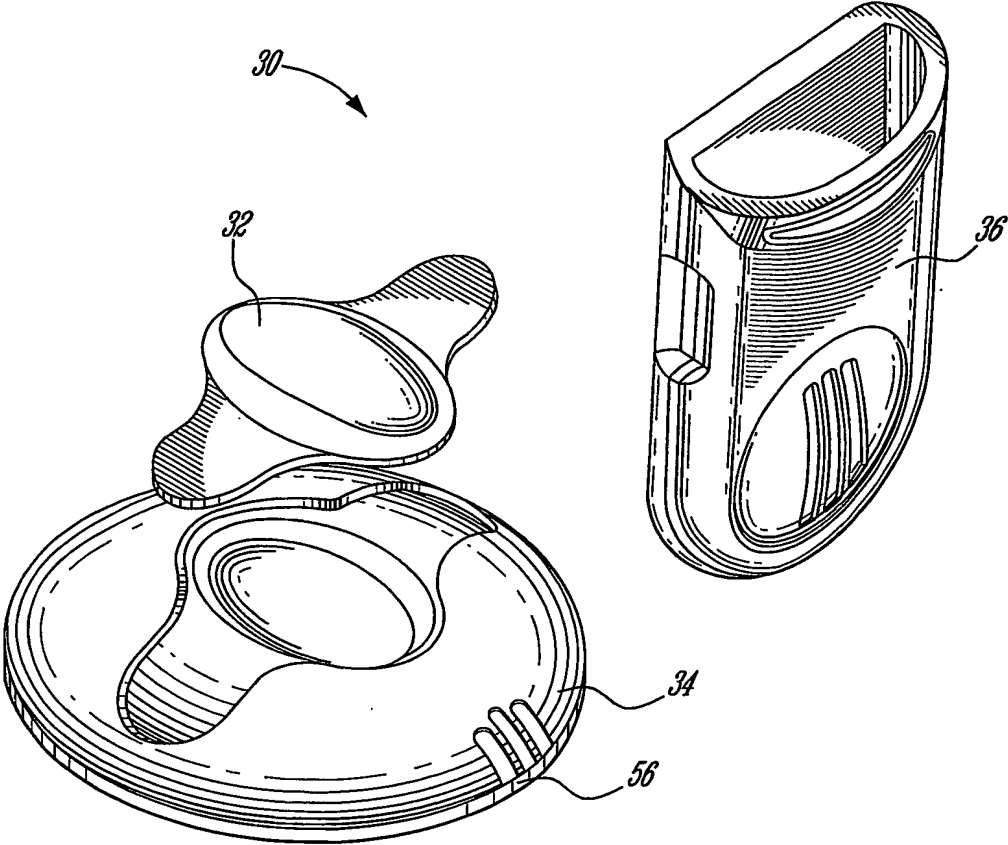


FIG. 7



FIG. 8

7/8

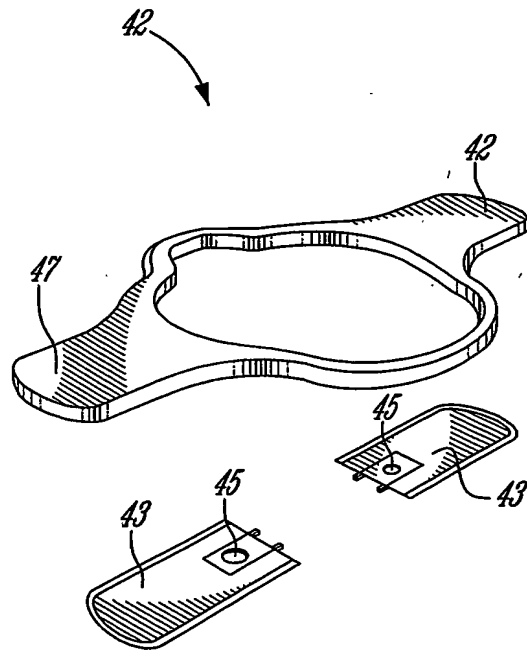


FIG. 9

8/8

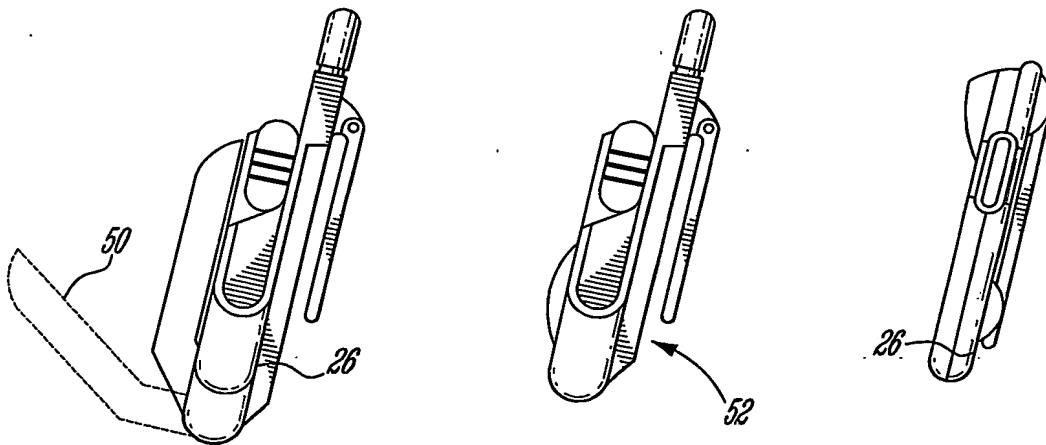
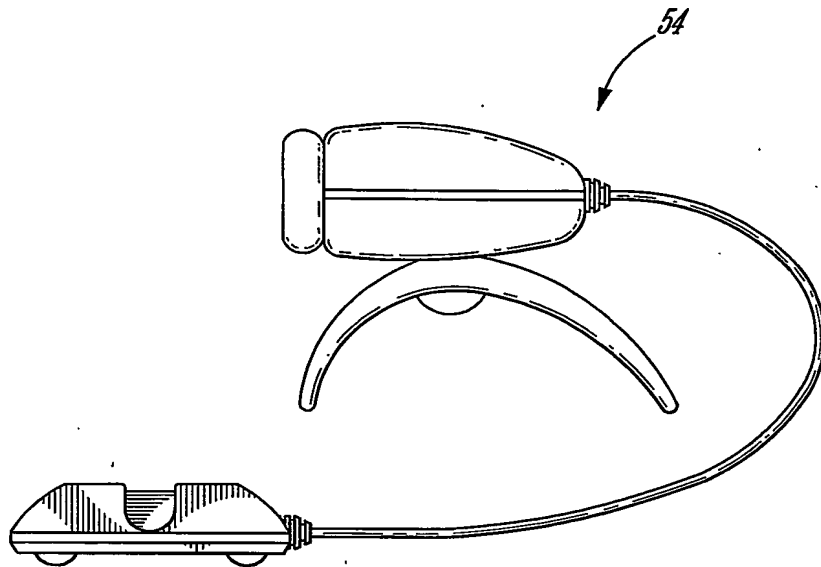


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 03/01171

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61B5/00 A61B5/0205

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 01855 A (GOPALSAMY CHANDRAMOHAN ;GEORGIA TECH RES CORP (US); RAJAMANICKAM R) 11 January 2001 (2001-01-11) cited in the application page 3, line 5-10 page 5, line 17-21 page 5, line 32 -page 6, line 18 page 8, line 15-35 page 11, line 30-35 page 12, line 11,12	1-5,8, 14, 16-18, 20,21, 24-28
A		7,9-13, 15,19, 22,23, 29-32
Y	-/-	6

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

14 November 2003

Date of mailing of the international search report

28/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Rivera Pons, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 03/01171

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 00111 A (BODYMEDIA INC) 3 January 2002 (2002-01-03) page 5, line 6 -page 15, line 2 figures 1-13 ----	1-6, 14, 17, 18, 20, 21, 25
X	US 6 289 238 B1 (VON CZETTRIZ GOTTHART ET AL) 11 September 2001 (2001-09-11) column 18, line 28-47 column 19, line 6 -column 20, line 61 column 21, line 23 -column 24, line 9 ----	1-5, 7, 8, 14, 16, 17, 20, 21, 24
X	US 2002/057202 A1 (LUZON RONEN) 16 May 2002 (2002-05-16) page 2, paragraphs 32, 35, 36 page 3, paragraphs 44-50 page 4, paragraphs 57, 58 ----	1-4, 14, 16-18, 20, 21
X	US 4 494 553 A (SCIARRA MICHAEL J ET AL) 22 January 1985 (1985-01-22) column 1-4 ----	1-3
X	US 2002/099277 A1 (HARRY ANDREA ET AL) 25 July 2002 (2002-07-25) page 2, paragraph 12 page 3, paragraphs 26-28 page 5, paragraph 42 ----	1, 2, 4, 5
X	US 2002/013538 A1 (TELLER DAVID) 31 January 2002 (2002-01-31) page 3, paragraph 43 -page 5, paragraph 63 page 3, paragraph 43 -----	1
Y		6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 03/01171

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0101855	A	11-01-2001	AU 6074500 A	22-01-2001
			CA 2374054 A1	11-01-2001
			CN 1390110 T	08-01-2003
			EP 1198197 A1	24-04-2002
			JP 2003507147 T	25-02-2003
			WO 0101855 A1	11-01-2001
WO 0200111	A	03-01-2002	US 6605038 B1	12-08-2003
			AU 7009201 A	08-01-2002
			BR 0111918 A	13-05-2003
			CA 2413148 A1	03-01-2002
			EP 1292218 A1	19-03-2003
			WO 0200111 A1	03-01-2002
			US 2002019586 A1	14-02-2002
US 6289238	B1	11-09-2001	DE 4329898 A1	06-04-1995
			US 6577893 B1	10-06-2003
			DE 59403133 D1	17-07-1997
			WO 9507048 A1	16-03-1995
			EP 0719108 A1	03-07-1996
			US 5862803 A	26-01-1999
			US 5957854 A	28-09-1999
US 2002057202	A1	16-05-2002	AU 1266902 A	06-05-2002
			WO 0234133 A2	02-05-2002
US 4494553	A	22-01-1985	NONE	
US 2002099277	A1	25-07-2002	AU 8785601 A	26-03-2002
			WO 0222010 A1	21-03-2002
US 2002013538	A1	31-01-2002	CA 2335908 A1	16-11-2000
			EP 1115325 A2	18-07-2001
			WO 0067633 A2	16-11-2000

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.